


DCN-SWIND Individual Channels

www.boschsecurity.com



BOSCH
Invented for life

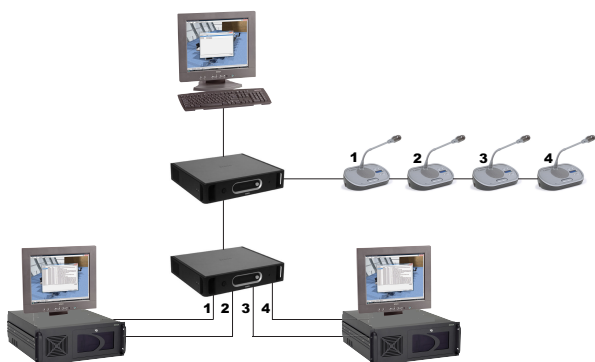

- ▶ Easy routing of individual audio channels
- ▶ Up to 26 Individual Channels can be defined

The Individual Channels software is used to route individual delegate microphone audio signals to the DCN system audio channels. These individual audio channels can only be received by Audio Expanders or Cobranet Interfaces.

Functions

Individual Channels

A typical application for the Individual Channels software is to individually record a selected number of microphones in a courtroom environment (witness protection often needs unrecognizable audio). The individual channels share the DCN audio channels with interpretation channels. A maximum of 26 individual channels can be used.

Route Individual Channels

When a delegate audio signal is assigned as an individual channel it is routed to a specific DCN audio channel and available on the output of an Audio Expander or Cobranet Interface. Optionally, it is then sent to an external audio processing device (e.g. distortion/vocoder) and returned to the audio input of the CCU, Audio Expander or Cobranet Interface.

Delegate units which are used in Voice Activation mode, dual mode and all wireless units can not be assigned to an individual channel.

Recorder trigger

The digital output contact of the connected Audio Expander or Cobranet Interface becomes automatically active as soon as the presence of the individual channel signal has been recognized. The output contact is threshold configurable in the Audio Expander and Cobranet Interface.

Ordering information

DCN-SWIND Individual Channels

Routes an individual delegate microphone audio signal to an audio channel of the DCN system. Can not be used with the DCN Wireless Discussion units and DCN-DDI/DCN-DIS in dual mode.

Order number **DCN-SWIND**

DCN-SWIND-E Individual Channels E-code

Routes an individual delegate microphone audio signal to an audio channel of the DCN system. Can not be used with the DCN Wireless Discussion units and DCN-DDI/DCN-DIS in dual mode.

Electronic authorization code.

Order number **DCN-SWIND-E**

Represented by:

Americas:

Bosch Security Systems, Inc.
12000 Portland Avenue South
Burnsville MN 55337, USA
Phone: +1-800-392-3497
Fax: +1-800-955-6831
audiosupport@us.bosch.com
www.boschsecurity.com

Europe, Middle East, Africa:

Bosch Security Systems B.V.
P.O. Box 80002
5617 BA Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia

China:

Bosch (Shanghai) Security Systems Ltd.
201 Building, No. 333 Fuquan Road
North IBP
Changning District, Shanghai
200335 China
Phone +86 21 22181111
Fax: +86 21 22182398
www.boschsecurity.com.cn

America Latina:

Robert Bosch Ltda Security Systems Division
Via Anhanguera, Km 98
CEP 13065-900
Campinas, Sao Paulo, Brazil
Phone: +55 19 2103 2860
Fax: +55 19 2103 2862
al.securitysystems@bosch.com
www.boschsecurity.com