

# DCN-SWSMV Synoptic Microphone and Voting Software

www.boschsecurity.com



**BOSCH**  
Invented for life



- ▶ Synoptic room overview for monitoring and controlling the microphones
- ▶ Voting control with individual results
- ▶ Real-time voting results displayed in Microsoft PowerPoint®
- ▶ On-screen help in many languages

The DCN-SWSMV Synoptic Microphone and Voting Software provides a range of conference facilities when used in combination with a DCN Wireless or DCN Next Generation system. The available functions include automatic seat assignment, synoptic microphone monitoring and control, and voting management.

## Functions

### Ease of use

Although it offers many powerful features, the software is extremely easy to use thanks to its innovative design. The application moves away from traditional control panels and buttons and replaces them with a highly intuitive graphic user interface. All functions are controlled from a single window making the software suitable for touch screen operation. The software features on-screen help in most major languages.

### User interface

The user interface is based on a graphical representation of the conference venue. When a device is connected to the system it is automatically

recognized and an icon is created for it on the on-screen room layout. The icons display information about device status and can be used by the operator to select individual devices for remote control functions. If a device becomes disconnected from the system, a red cross is displayed on top of its icon to alert the operator.

### Operating modes

The Synoptic Microphone and Voting Software can operate in the following modes, depending on the required task:


- Assignment mode allows you to assign names to microphone icons. The positions of the icons on the room layout can also be changed using the standard windows 'drag & drop'.
- Microphone control mode allows you to observe and control the state of each individual microphone. Microphones can be switched on and off, or placed in the 'request to speak' queue.
- Battery and signal view mode shows the remaining battery charge time and the signal strength for each wireless discussion unit
- Voting result mode shows individual results in different colors according to votes cast

**Notice**

The different symbols in the various modes are specially designed so that they are also easily identified by persons with the visual disability of color blindness.

**Parliamentary and real-time voting**

The application provides parliamentary voting functionality. The system operator can summon delegates to vote, as well as starting and stopping voting sessions. Final vote results can be automatically printed or exported to a file; the software can also be configured to send real-time voting information to Microsoft PowerPoint® for display.

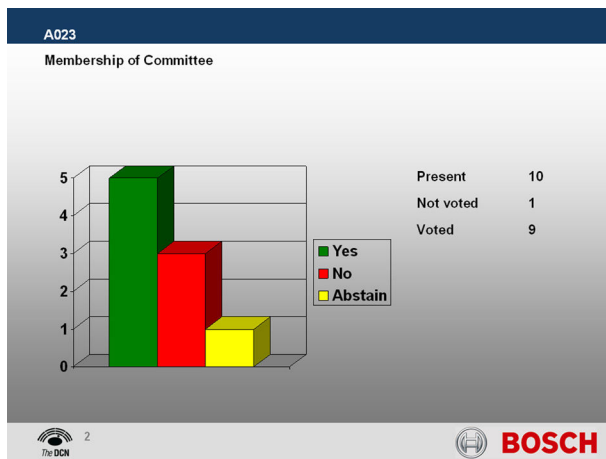

Real-time voting results in Microsoft PowerPoint®

**Installation/configuration notes**

Used in combination with a DCN Wireless or DCN Next Generation system.

**Technical specifications**

Supported operating system	Windows 7 Home Premium (32 and 64 bits) or above or Windows Vista Home Premium(32 or 64 bits) or above All with the latest service packs and updates.
----------------------------	--

**Ordering information****DCN-SWSMV Synoptic Microphone and Voting Software**

Include automatic seat assignment, synoptic microphone monitoring and control, and voting management.

Order number **DCN-SWSMV**

**Software Options****DCN-SWSMV-E Synoptic Microphone and Voting Software E-code**

Include automatic seat assignment, synoptic microphone monitoring and control, and voting management. Electronic authorization code.

Order number **DCN-SWSMV-E**

**Represented by:**

**Americas:**

Bosch Security Systems, Inc.  
12000 Portland Avenue South  
Burnsville MN 55337, USA  
Phone: +1-800-392-3497  
Fax: +1-800-955-6831  
audiosupport@us.bosch.com  
www.boschsecurity.com

**Europe, Middle East, Africa:**

Bosch Security Systems B.V.  
P.O. Box 80002  
5617 BA Eindhoven, The Netherlands  
Phone: + 31 40 2577 284  
Fax: +31 40 2577 330  
emea.securitysystems@bosch.com  
www.boschsecurity.com

**Asia-Pacific:**

Robert Bosch (SEA) Pte Ltd, Security  
Systems  
11 Bishan Street 21  
Singapore 573943  
Phone: +65 6571 2808  
Fax: +65 6571 2699  
apr.securitysystems@bosch.com  
www.boschsecurity.asia

**China:**

Bosch (Shanghai) Security Systems Ltd.  
201 Building, No. 333 Fuquan Road  
North IBP  
Changning District, Shanghai  
200335 China  
Phone +86 21 22181111  
Fax: +86 21 22182398  
www.boschsecurity.com.cn

**America Latina:**

Robert Bosch Ltda Security Systems Division  
Via Anhanguera, Km 98  
CEP 13065-900  
Campinas, Sao Paulo, Brazil  
Phone: +55 19 2103 2860  
Fax: +55 19 2103 2862  
al.securitysystems@bosch.com  
www.boschsecurity.com